


## HPC-312-Series



Areas of usage; polyclinic door information systems, meeting rooms or conference rooms door information systems and in interactive kiosk systems for routing and informing.

- ✓ Access to Patient Information with HIS
- ✓ Slim Industrial Stainless Case
- ✓ 0-60 ° C Operating Temperature
- ✓ Corporate Color and Logo Options

# HPC-312-Series

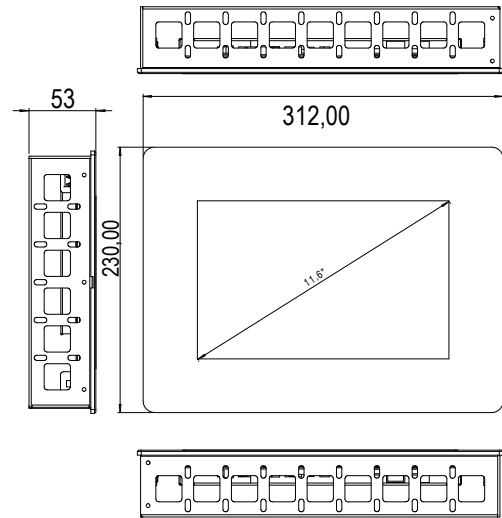

System	
CPU	Intel® Celeron N2930 SoC
Cache	N.A.
Memory	1 x 204-pin DDR3L-1333 SO-DIMM up to 8GB
Video RAM	Intel HD Graphics, 313MHz - 854MHz
Chipset	Intel® NM10 / QM77
Watchdog Timer	255 Level Reset
System Fan	1 x 4cm / 10CFM
I/O	
Serial Port	Serial port headers (3 * RS232, 1 * RS232/422/485)
Parallel Port	SPP/EPP/ECP
USB Port	4 x (USB 2.0/3.0)
KB / MS	1 x PS2 K/B and Mouse
LAN	2 x Realtek RTL8111G Gigabit LAN with Enhanced Surge Protection
Wireless Lan	802.11 b / g (Optional)
Audio	Realtek ALC662 HD Audio codec
Expansion Slot	mSATA/mini-PCI Express Combo slot
Data Storage	
SSD	M-SATA
Feed	
Input	110 / 220VAC - 12 / 24VDC - PoE

LCD Screen	
Size / Type	11.6" / 16:9
Maks. Resolution	1280 x 800
Pixel Pitch	0.297mm x 0.297mm
Max Color	16.7 M
Brightness (cd/m2)	250cd
Contrast Ratio	700/1
Viewing Angle	140°(H),120°(V)
Back Light MTBF	50,000 hours
Touch Screen	11.6" - Capacitive Touch
Extra Video Output	
Type	HDMI/DVI
Max. Resolution	1920x1080
Mechanical & Environmental Specifications	
Operating Temperature	0 ~ 60°C
Storage Humidity	5 ~ 95% (non-condensing)
Case	Heavy-Duty Metal Case
Front Frame	Glass
Weight	Variable according to screen size (1-5 kg)
Dimensions	(WxHxD) Variable by screen size
Mounting	Built-in

Order code				
CPU	PSU	RAM	HD	Wifi
J1900	AC110/220	R4	32GB	Optional
	DC12/24	R8		
	PoE			