


HPC-312-And



Areas of usage; polyclinic door information systems, meeting rooms or conference rooms door information systems and in interactive kiosk systems for routing and informing.

- ✓ Access to Patient Information with HIS
- ✓ Slim Industrial Stainless Case
- ✓ 0-60 ° C Operating Temperature
- ✓ Corporate Color and Logo Options

HPC-312-And

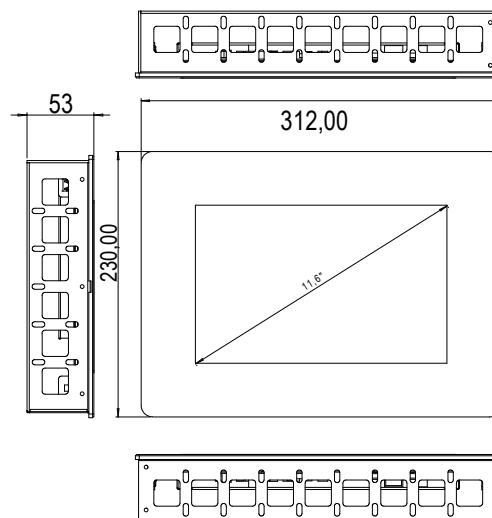

System	
CPU	All Winner R18, Quad Core,Cortex A53 1.5 GHz
Cache	N.A.
Memory	1G LPDDR3 (Option 2G)
Video RAM	N.A.
Chipset	N.A.
Watchdog Timer	Support
System Fan	Android 6.0

I/O	
Serial Port	3 x RS-232 ports (Opsiyonel)
Parallel Port	N.A.
USB Port	2 x USB 2.0
KB / MS	N.A.
LAN	1x Lan
Wireless Lan	802.11 b / g (Opsiyonel)
Audio	Support L/R phone jack and 10W / 8Rx2
Expansion Slot	N.A.

Data Storage	
EMMC	8GB/32GB

Feed	
Input	110 / 220VAC - 12 / 24VDC - PoE

Order code				
CPU	PSU	RAM	HD	Wifi
Cortex A53	AC110/220	R4	EMMC8G	Optional
	DC12/24	R8	EMMC32G(Opsiyonel)	
	PoE	R16		

LCD Screen	
Size / Type	11.6" / 16:9
Maks. Resolution	1280 x 800
Pixel Pitch	0.297mm x 0.297mm
Max Color	16.7 M
Brightness (cd/m2)	250cd
Contrast Ratio	700/1
Viewing Angle	140°(H),120°(V)
Back Light MTBF	50,000 hours
Touch Screen	11.6" - Capacitive Touch (Optional)

Extra Video Output	
Type	HDMI
Max. Resolution	1920x1080

Mechanical & Environmental Specifications	
Operating Temperature	0 ~ 60°C
Storage Humidity	5 ~ 95% (non-condensing)
Case	Heavy-Duty Metal Case
Front Frame	Glass
Weight	Variable according to screen size (1—5 kg)
Dimensions	(WxHxD) Variable by screen size
Mounting	Built-in